
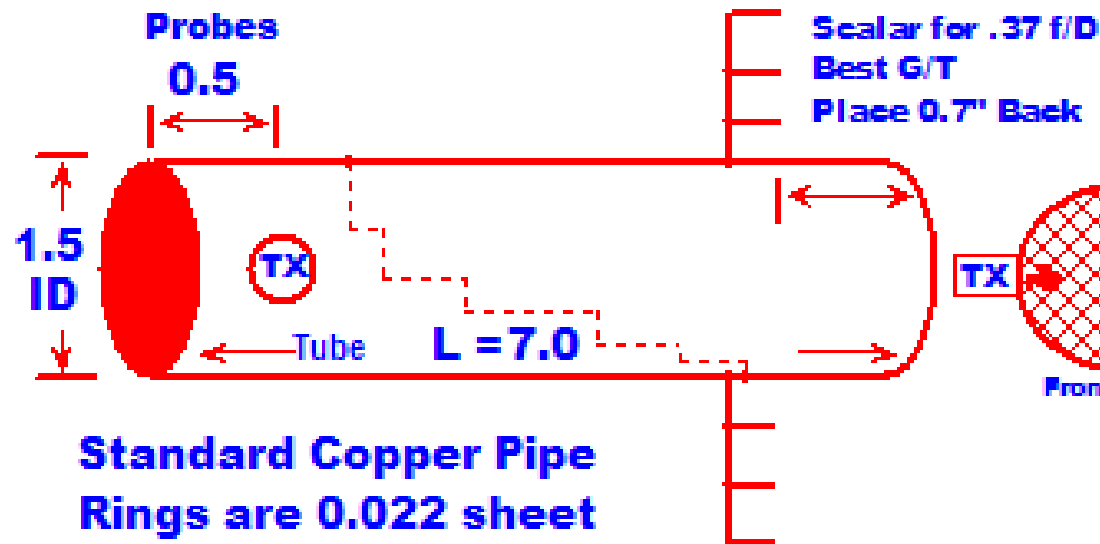


# WD5AGO 5760 MHz CP Feed for f/D of 0.35 to 0.40

5 Step Septum

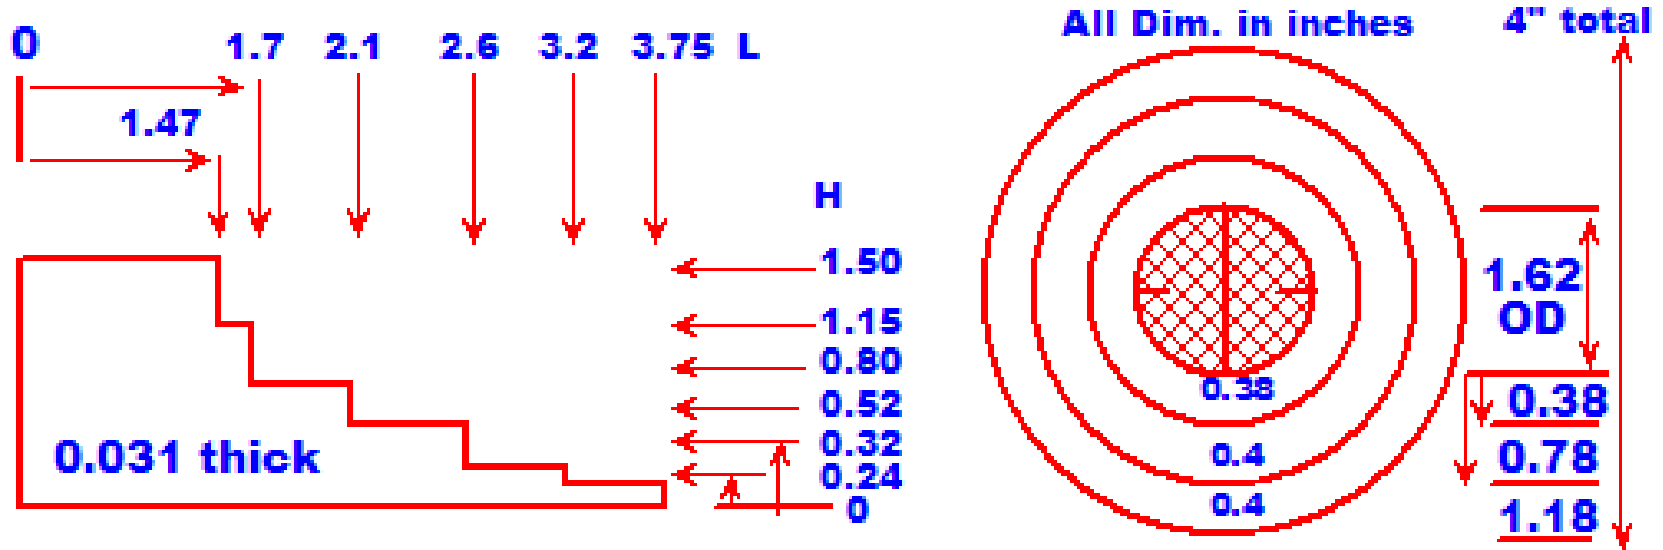

Probes: Start with 0.05" center pin. Using 5/32" solid rod, drill center hole sand and form as noted. Slide and solder to connectors center pin.

Standard Copper Pipe Rings are 0.022 sheet

All are 0.4

Brass mounting Plate - maintain 50 ohms

WD5AGO

Thomas Henderson WD5AGO

Title: 5760 CP 5S FEED.PIC

Rev A

Date: Wed, May 10, 2010

Sheet 1 of 1

Rev B